

APPLICATION NOTE

www.ittcannon.com


Cm5 Servo Motor Connector

April 2007

The Challenge

Typical interconnects for servo motors require separate circular connectors for power and signal cables.

Conventional connectors such as M40, Trident, MIL-C-5015 and CA-Bayonets are bulky, heavy and require number of components to assemble. Engineers are constantly searching for new and robust connector alternatives.

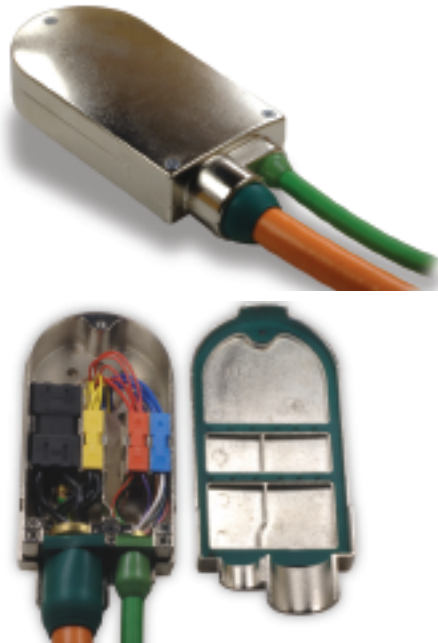

Features

- Smaller, low profile interconnect
- Over 50% fewer components to assemble
- Single mounting hole (fits M40 foot print)
- Sealing options IP65 or IP67
- Total circuits: 4 power / up to 24 Signals
- Maximum current / contact: 40A power* / 3A signal
- Accommodates a wide variety of servo motor cables with diameters of: signal 11mm max and power 19mm max
- Housing can accommodate custom markings

* 80 degree C motor surface temp and 40 degree C ambient temp

The ITT Solution ...

The Cm5 connector features a simplified connector design that integrates both power and signal cables into a single zinc die cast housing. This innovative design facilitates installation with fewer components, occupies less space and is just one-third the height of traditional circular connectors used on servo motors. The Cm5 is one of several designs being released to support a wide variety of servo motor applications.

Applications

- Servo Motors
- Textile Machines
- Robotics
- CNC Machines
- Conveyors
- Packaging
- Linear Motors
- Factory Automation

Benefit to the Customer

- Simplifies interconnect construction and design for both large and small motors
- Low profile design for space saving applications
- Cost reduction solution
- Housing completely sealed and shielded
- Excellent vibration resistance
- 2 sealed entries for power and signal cable
- Optimizes productivity/installation during assembly
- Improves the aesthetic look of customers product
- Replaces two conventional circular connectors

For application assistance, please contact:
 AMERICAS
 George Blazas, george.blazas@itt.com
 EUROPE
 Bernhard Rupp, bernhard.rupp@de.itt.com