


| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 59.6              |
| B1  | 31.8              |
| B2  | 26.8              |
| C   | 24.05             |
| D   | 4                 |
| E   | 78                |
| F   | 49.2              |
| G   | 63.5              |
| H   | M5                |

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 3   | DICHTKÖRPER / GROMMET               |
| 4   | ENDRING / ENDRING                   |
| 5   | KONTAKTSTIFT/ CONTACT PIN           |
| 8   | DOSENGEHÄUSE / SHELL                |
| 12  | ENDGEHÄUSE / ENDBELL                |

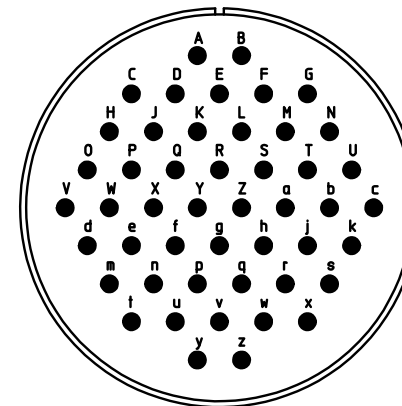

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.  
 Specification and Dimensions subject to change  
 Drawings illustrate normal insulator positioning

|  |
|--|
| <b>Material Specification:</b>                               |
| Shell Material: Aluminium alloy                              |
| Shell Plating: Olive drab chromate over cadmium (conductive) |
| Insulator Material: CR-Elastomere                            |
| Contact Material: Copper alloy                               |
| Contact Plating: Hard silver                                 |

all dimensions are in mm  
 Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
 CUSTOMER



description CA3100E36-10P-B-01  
 Wall mounting receptacle  
 Endbell with clamp and bushing  
 Metric Crimp / Pin / Layout: 36-10

© All rights reserved. Reproduction or issue to third in any form  
 whatever is only permitted with written authorization of ITT Cannon



page 1/1  
 revision 3765 3. Sep 24