




NO.	MASSE / DIM
D1 (+0 -0.15)	53.4
D2	M5
D3 (INCH)	1 3/4-18 UNS-2A
D4 (+0.1 -0)	37.8
E	44.5
L1 (MAX)	71
L2 (+0.4 -0)	24.05
L3 (±0.2)	4
L4 (±0.3)	57
L5 (MIN)	11

NO	NOTE
1	SPECIFICATION AND DIMENSIONS ARE SUBJECT TO CHANGE
2	DRAWING ILLUSTRATE NORMAL INSULATOR POSITIONING

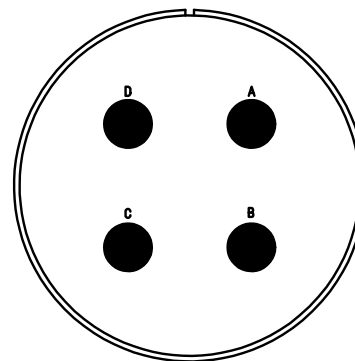

<u>Material Specification:</u>	
Shell Material:	Aluminium alloy
Shell Plating:	Chromate over Cadmium, olive drab
Insulator Material:	Flame Retardant rubber
Contact Material:	Delivery without contacts
Contact Plating:	Delivery without contacts

all dimensions are in mm Dimensions without tolerance indications are general tolerances in acc. with ISO 2768-H		drawing for <b>CUSTOMER</b>	
 <b>ITT</b> <i>Engineered for life</i> <small>ITT Cannon Veam Italy S.r.l. 20020 Lainate (MI), Italy</small>	description <b>FRCIR030R-32-17P-F80-VO</b>		
	Rear mounting receptacle threaded mounting holes Short backshell no other accessories with wires sealing grommet Crimp for AWG wire (used in F80 insert) / Pin / Layout: 32-17		
© All rights reserved. Reproduction or issue to third in any form whenever is only permitted with written authorization of ITT Cannon		page 1/1	revision 6662 16. Sep 24